



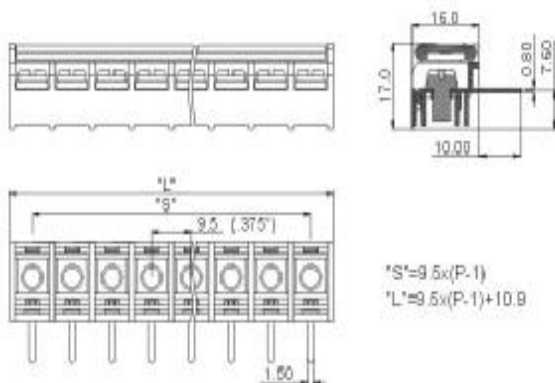

产品型号:WJ46SG

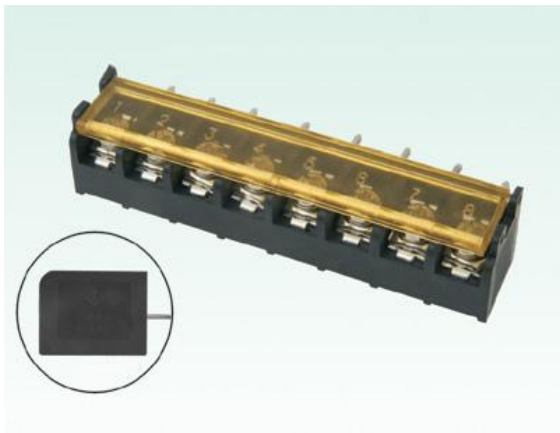

使用材质

绝缘塑件	PA66, UL94V-0
端子材料	黄铜, 0.8厚 镀锡
螺 丝	钢, M4 镀镍

电气性能

参考标准	UL	IEC
额定电压	300V	450V
额定电流	20A	32A
线径范围	22-12AWG	4.0mm ²
耐电压	AC2000V / 1 Min	
绝缘电阻	500M Ω /DC500V	

机械性能

温度范围	-40 $^{\circ}$ C~+105 $^{\circ}$ C
瞬时温度	+250 $^{\circ}$ C, 5秒
扭 矩	1.2N.m 10.6Lb.in
位 数	2P-12P
间 距	9.5mm

产品订购指南:

