



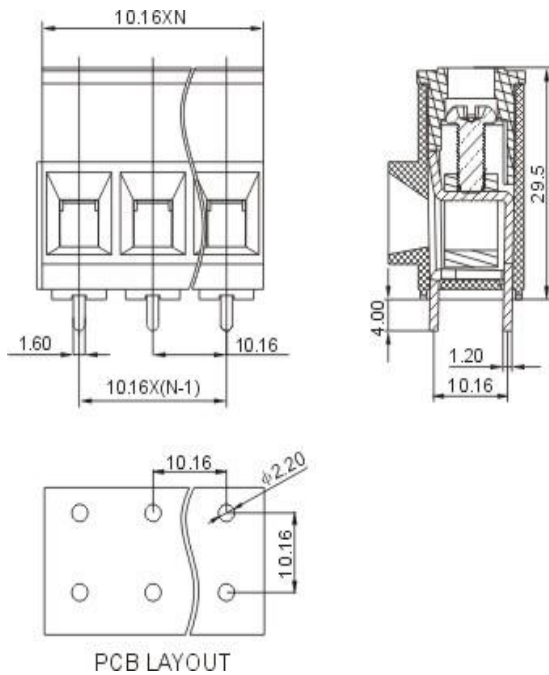

产品型号:WJ116V

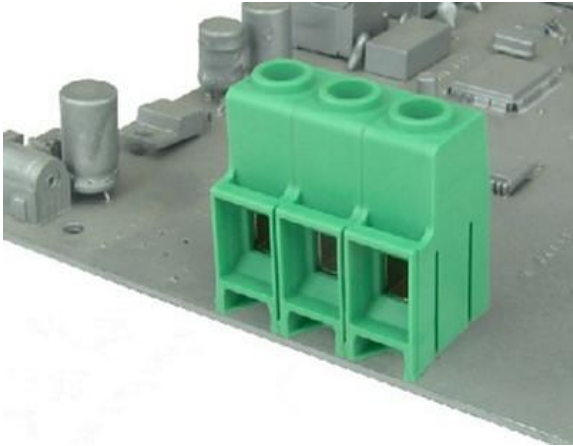

使用材质

绝缘塑件	PA66, UL94V-0
端子材料	黄铜, 镀镍
引脚焊针	紫铜, 镀锡
螺 丝	M4, 钢, 镀Cr3+钝化彩锌

电气性能

参考标准	UL	IEC
额定电压	300V	750V
额定电流	52A	57A
线径范围	20-6AWG	10.0mm ²
耐电压	AC3000V / 1 Min	
绝缘电阻	5000MΩ / 1000V	
接触电阻	20 MΩ	

机械性能

温度范围	-40℃~+105℃
瞬时温度	+250℃, 5秒
剥线长度	10mm
扭 矩	1.2Nm(10.5Lb-In.)
位 数	2P, 3P-24P
间 距	10.16mm

产品订购指南:

